



The rechargeable batteries are lead-lead dioxide

UN90-12DC (12V90Ah/10hr) systems. The dilute sulfuric acid electrolyte is absorbed by separators and thus immobilized.

In case the battery be accidentally overcharged producing hydrogen and oxygen, Special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.

Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

General Feature


- Absorbent Glass Mat(AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

Performance Characteristics

Capacity 77°F(25°C)	20 hour rate (5.0A、10.8V)	100Ah
	10 hour rate (9A、10.8V)	90Ah
	5 hour rate (16.2A、10.5V)	81Ah
	0.5 hour rate (109A 9.6V)	54.5Ah
Internal Resistance	Full charged Battery77°F(25°C): 5m	
Capacity affected by Temperature (20 hour rate)	104° F(40°C)	102%
	77° F(25°C)	100%
	32° F(10°C)	85%
	5° F(-15°C)	65%
Self-Discharge 68°F(20°C)	Capacity after 3 month storage	90%
	Capacity after 6 month storage	80%
	Capacity after 12month storage	60%
Max. discharge current77°F(25°C): 1750A(5S) Peak Discharge:3400A		
Charge (Constant Voltage)	Float: 13.6~13.8 V/77° F(25°C)	
	Cycle:14.7~14.9 V/77°F(25°C) Max. Current: 18.0A	

SPECIFICATION

Nominal voltage..... 12V
 Length(mm/inch).....306/12.1
 Width(mm/inch.....169/6.65
 Height(mm/inch).....208/8.19
 Total Height(mm/inch).....212/8.35
 Approx. Weight(kg/lbs).....27.0/59.5

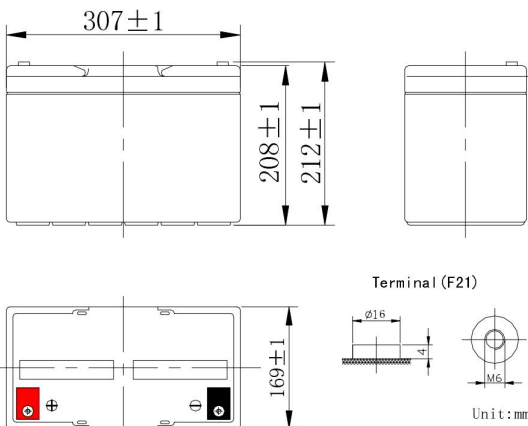









Discharge Constant Current (Amperes at 77° F25°C)

End Point Volts/Cell	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	205	165	109	60.0	25.6	17.8	9.40	5.15
1.65V	194	157	98.6	57.9	24.8	17.3	9.35	5.10
1.70V	182	148	88.2	55.4	24.0	16.8	9.30	5.10
1.75V	169	139	83.6	52.8	23.1	16.2	9.20	5.06
1.80V	154	129	78.8	52.0	22.1	15.5	9.00	5.00

Discharge Constant Power (watts at 77° F25°C)

End Point Volts/Cell	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	372	304	186	138	117	68.2	48.4	33.8
1.65V	353	299	180	134	115	67.0	47.8	33.6
1.70V	335	290	176	132	113	65.8	47.3	33.3
1.75V	317	279	170	129	110	64.6	46.7	33.2
1.80V	296	270	164	126	107	63.9	45.9	32.9

(Note)The above characteristics data are average values obtained Within three charge/discharge cycles not the minimum values.

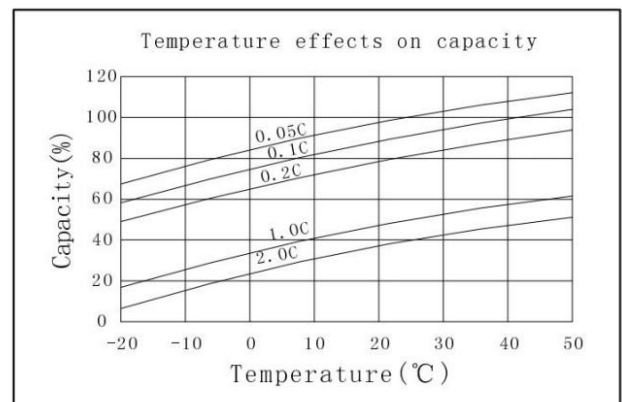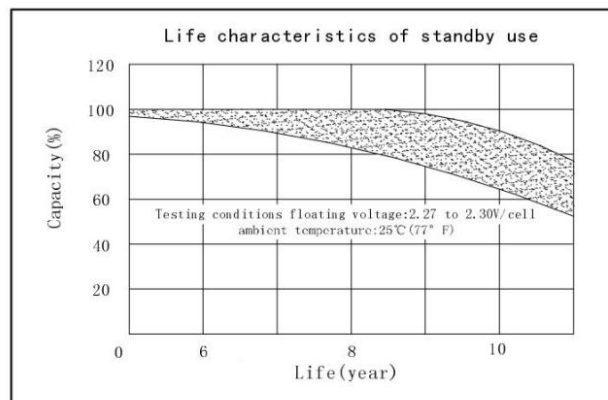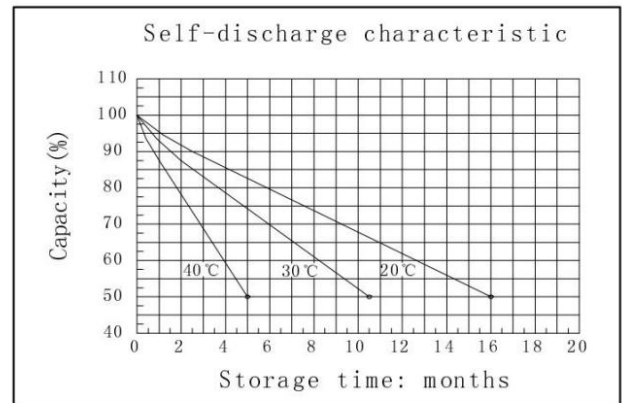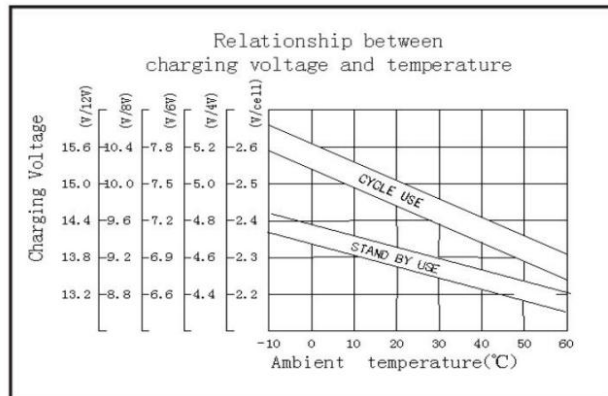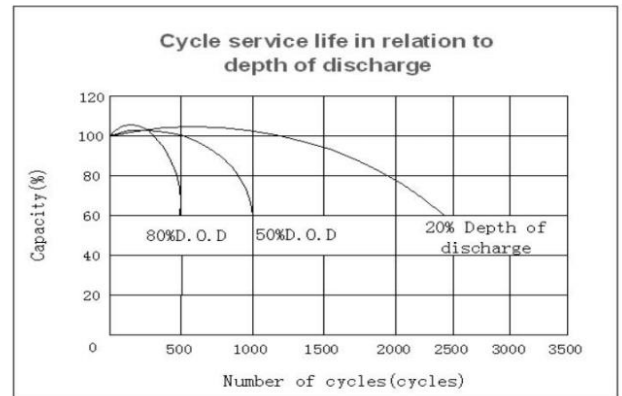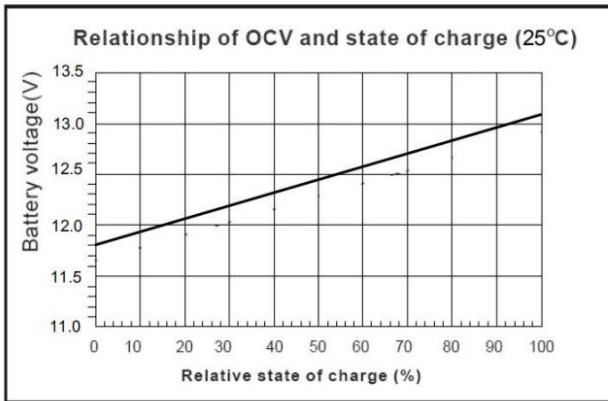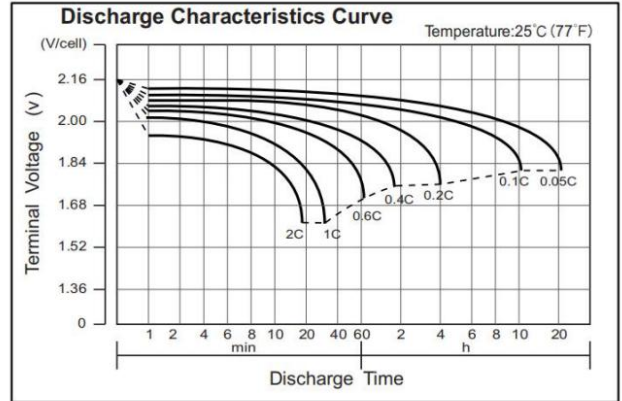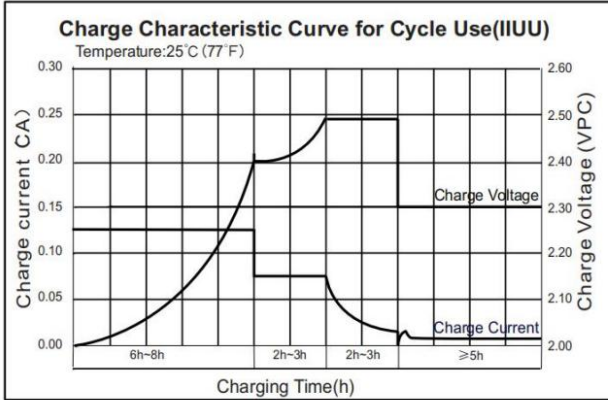

OREMA POWER CO., LTD

Add: Datang Industry Park Xinfeng Ganzhou City, Jiangxi Province, China

TEL: +86-0797-2299669 +86-0797- 2299553

FAX: +86-0797-2299553



www.oremabattery.com