



UN8-12 (12V8.0Ah/20hr)

The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and thus immobilized.



Should the battery be accidentally overcharged producing hydrogen and oxygen, Special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.

Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

General Feature


- Absorbent Glass Mat(AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

Performance Characteristics

Capacity 77°F(25°C)	20 hour rate (0.4A、10.5V)	8.0Ah
	10 hour rate (0.76A、10.5V)	7.6Ah
	5 hour rate (1.38A、10.5V)	6.9Ah
	1 hour rate (5.0 A、9.6V)	5.0Ah
Internal Resistance	Full charged Battery77°F(25°C):26mΩ	
Capacity affected by Temperature (20 hour rate)	104° F(40°C)	102%
	77° F(25°C)	100%
	32° F(10°C)	85%
	5° F(-15°C)	65%
Self-Discharge 68°F(20°C)	Capacity after 3 month storage	90%
	Capacity after 6 month storage	80%
	Capacity after 12month storage	60%
Max. discharge current77°F(25°C): 120A(5S)		
Charge (Constant Voltage)	Float: 13.6~13.8 V/77° F(25°C)	
	Cycle:14.5~14.9 V/77°F(25°C) Max.Current: 2A	

SPECIFICATION

Nominal voltage 12V
 Number of cell 6
 Length(mm/inch) 151/5.94
 Width(mm/inch) 65/2.56
 Height(mm/inch) 94/3.7
 Total Height(mm/inch) 100/3.94
 Approx. Weight(kg/lbs) 2.25/4.96

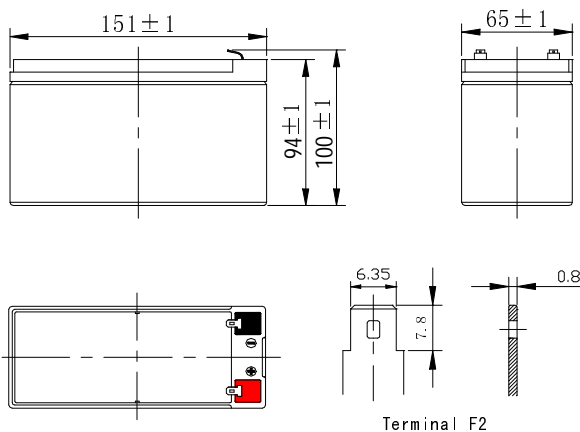









Discharge Constant Current (Amperes at 77° F 25 °C)

End Point Volts/Cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	30.5	21.0	15.0	8.95	5.00	2.15	1.40	0.77	0.42
1.65V	29.7	20.4	14.6	8.78	4.95	2.10	1.40	0.77	0.41
1.70V	28.5	19.8	14.1	8.59	4.90	2.05	1.39	0.76	0.41
1.75V	27.3	19.3	13.4	8.39	4.84	2.00	1.38	0.76	0.40
1.80V	26.1	18.7	12.8	8.18	4.80	1.95	1.36	0.76	0.40

Discharge Constant Power (watts at 77° F 25 °C)

End Point Volts/Cell	5min	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	68.3	43.3	31.7	18.7	13.8	11.0	6.00	4.24	2.78
1.65V	66.1	42.2	31.0	18.1	13.5	10.7	5.93	4.20	2.76
1.70V	64.8	40.8	30.1	17.4	13.0	10.4	5.80	4.12	2.73
1.75V	62.3	39.3	29.2	16.5	12.3	9.90	5.66	4.00	2.70
1.80V	59.1	37.5	27.4	15.4	11.6	9.30	5.51	3.85	2.60

(Note)The above characteristics data are average values obtained Within three charge/discharge cycles not the minimum values.

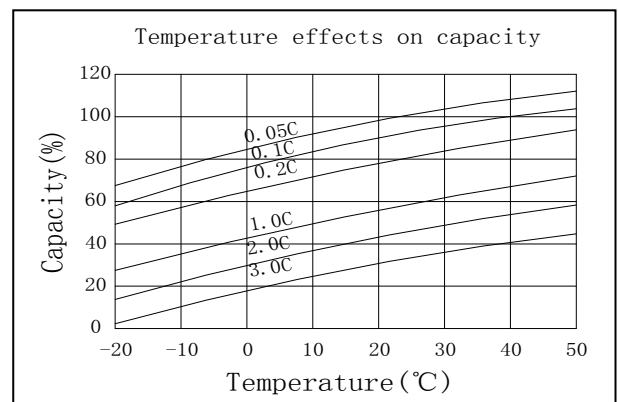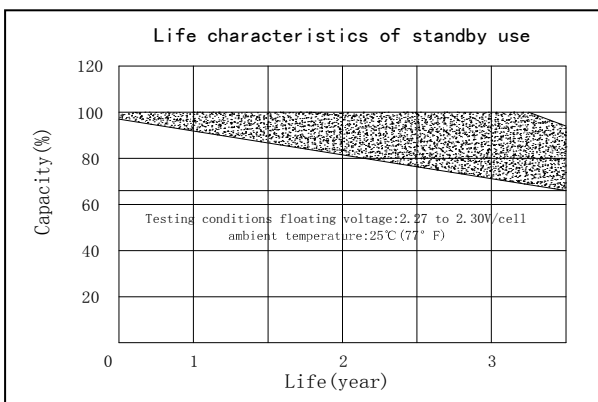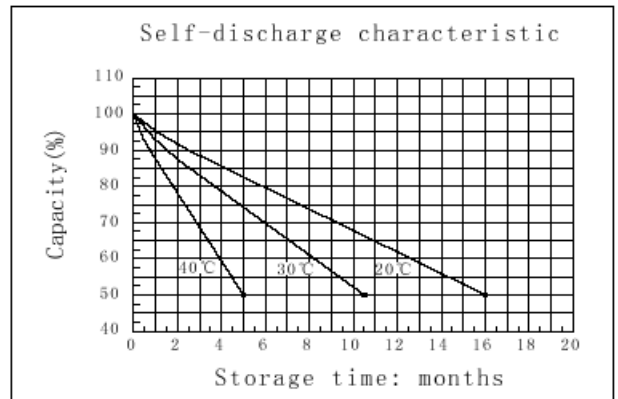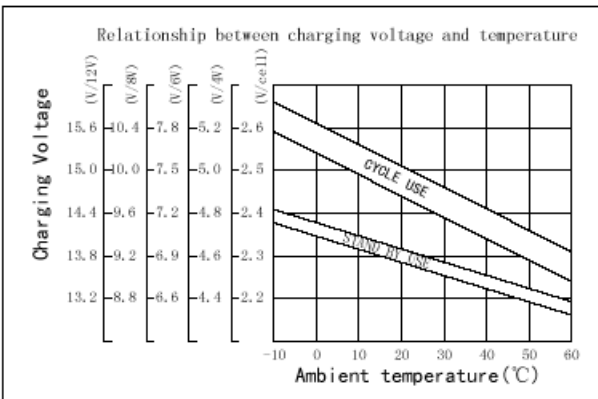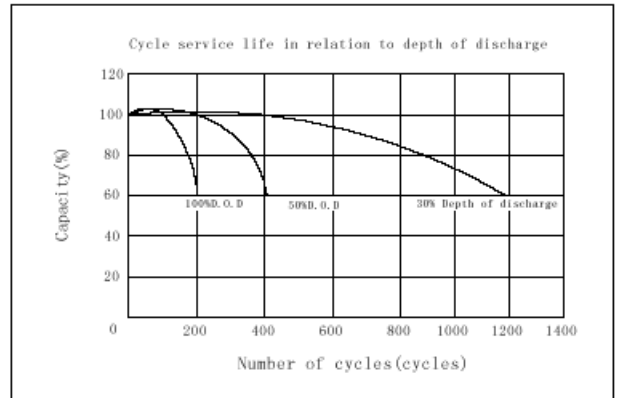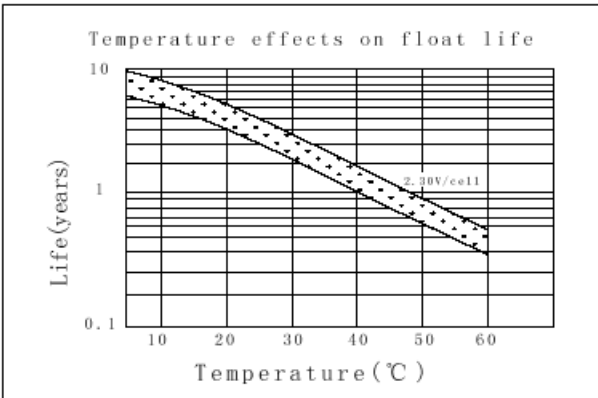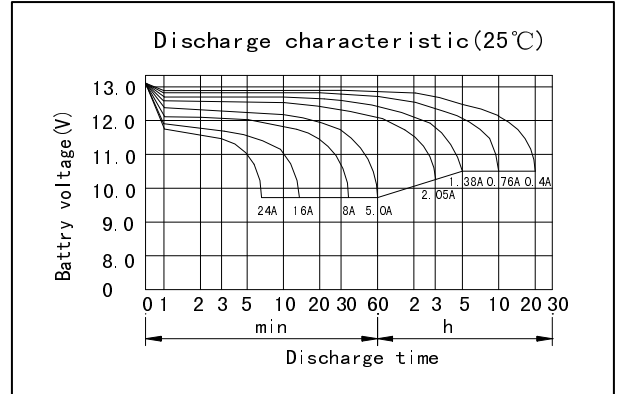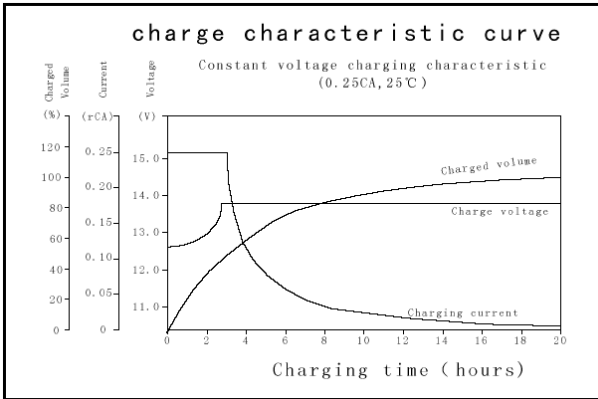

OREMA POWER CO., LTD

Add: Datang Industry Park Xinfeng Ganzhou City, Jiangxi Province, China

TEL: +86-0797-2299669 +86-0797- 2299553

FAX: +86-0797-2299553



www.oremabattery.com